



LEADER PF1 COMPACT

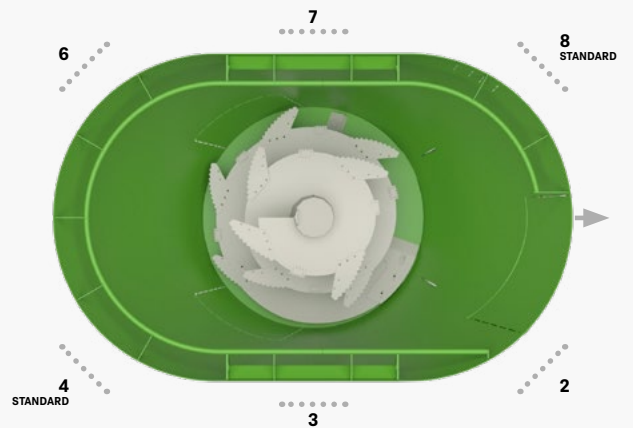

It brings to the attention of all potential customers, all recipients, and to the maximum extent possible, external interlocutors, that Faresin Industries S.p.A. adopts a general Disclaimer regarding the description of the technical and functional characteristics of its machineries, as well as the manner of their use, also with regard to their safety. The Disclaimer must be understood as having a general scope, and therefore Faresin Industries s.p.a. invites to know it, also by accessing the website: www.faresindustries.com



FARESIN.COM



| ENGINE STAGE V | | 1.12C | 1.14C | 1.16C |
|-----------------------|----------------|-----------|-----------|-----------|
| Builder | | FPT N45 | FPT N45 | FPT N45 |
| Power | kW/hp | 125/170 | 125/170 | 125/170 |
| Aftertreatment system | | DOC + SCR | DOC + SCR | DOC + SCR |
| Capacity | m ³ | 12 | 14 | 16 |

| DIMENSIONS ECOMIX | | 1.12C | 1.14C | 1.16C |
|--------------------------|----|-------|-------|-------|
| [A] total length | mm | 8010 | 7940 | 7440 |
| [B] height | mm | 2525 | 2780 | 3010 |
| [C] width | mm | 2550 | 2550 | 2550 |
| [D] milling cutter width | mm | 2040 | 2040 | 2040 |
| [E] milling height | mm | 4945 | 4890 | 5540 |
| [F] unloading height | mm | 375 | 375 | 395 |
| [G] outside wheels | mm | 2165 | 2165 | 2235 |
| [H] axle clearance | mm | 3860 | 3860 | 3860 |
| [I] rear projection | mm | 1000 | 1000 | 1000 |
| [L] front projection | mm | 3150 | 3080 | 2580 |
| [M] frame height | mm | 325 | 325 | 345 |

WEIGHT

| | | | | |
|------------------|----|-------|-------|-------|
| Unladen weight | kg | 10500 | 11300 | 12300 |
| Maximum capacity | kg | 4200 | 4900 | 5600 |

TYRES

| | | | | |
|----------|--|--------------|--------------|--------------|
| Standard | | 315/60 R22.5 | 315/60 R22.5 | 315/60 R22.5 |
|----------|--|--------------|--------------|--------------|

| CONFIGURATION | ECOMIX | |
|---|--------|--------------------------------------|
| Number of knives | | from 10 to 14 |
| Adjustable seat with air suspension | | ● |
| Joystick | | multi-function electro-proportional |
| Cabin | | PF Cab |
| Ventilation system | | three speeds and temperature setting |
| 6 Work led lights | | ● |
| Fuel tank | l | 230 |
| Electronic weighing system with four sensors between mixing tub and frame | | ● |
| Maximum speed | km/h | 30 |
| Front axle | | drive, steering and with suspension |
| Rear axle | | fixed (steering option) |
| Abs system | | - |
| Asr system | | - |
| Number of augers | | 1 |
| Speed range of the auger | rpm | 5, 10, 15, 20, 25, 30, 40, 50 |
| External diameter of milling cutter roller | mm | 600 |
| Hydraulic counter-knives | | 2 |
| Shredder on milling cutter | | ○ |
| Certifiable and or automatic greasing system | | ○ |

● Standard ○ Optional - Not available